TS-CHUTE

The Transnorm Safeglide® Spiral Chute exhibits a sophisticated and controlled method of delivering most products from a higher elevation down a lower level. These chutes are available in four (4) sizes to accommodate a large range of products. Other degrees available. Contact Transnorm.

Transnorm Safeglide Chute

- Multiple Sizes and Configurations
- Center Column with Glass wrapped around it
- Gel Coat Surface

F.O.B. Arlington, Texas

transnorm
your best move

CONFIGURATIONS:

Counter - Clockwise

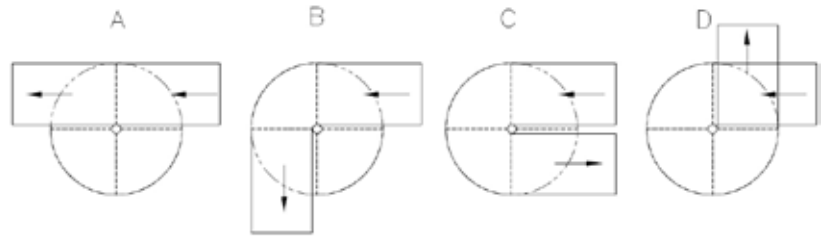

Clockwise

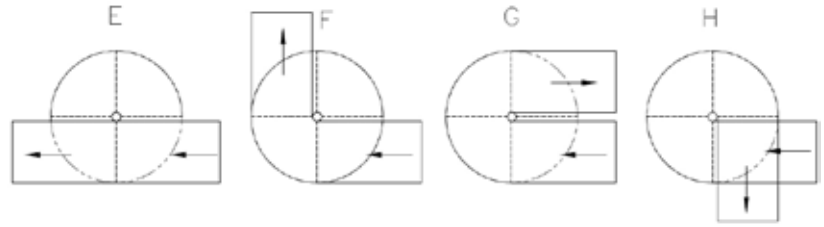

For warranty/spare parts contact Transnorm System's customer service. Please provide Transnorm's serial number.
Transnorm System Inc.
2810 Avenue E East
Arlington, TX 76011
Phone: 1-800-331-1749 X 249
Fax: (972) 606-0768

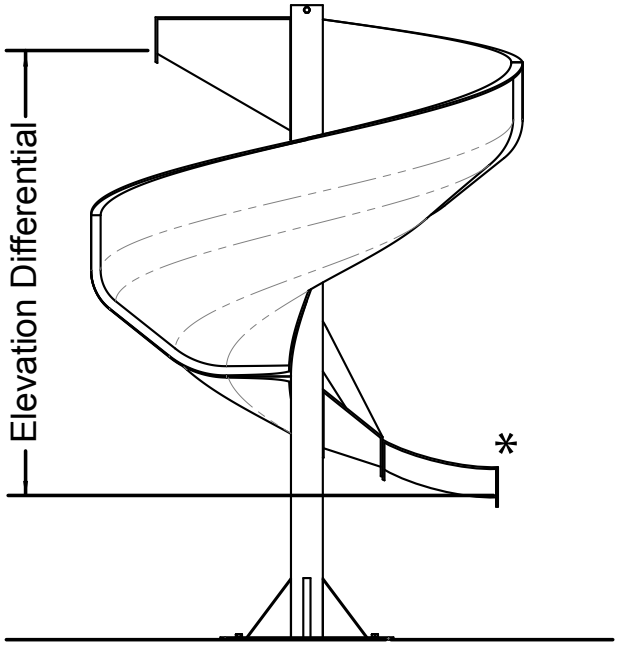

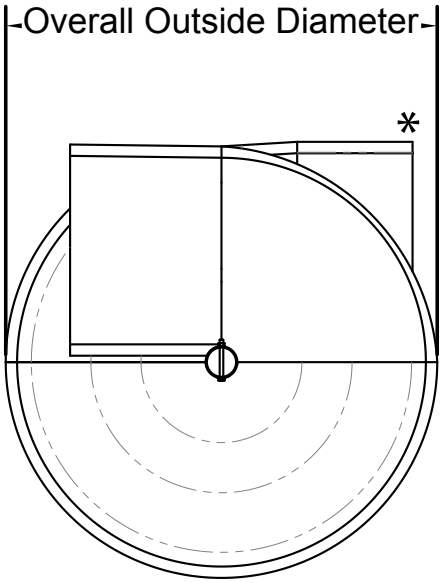

• STANDARD SPECIFICATIONS

MATERIAL- 3/8" thick Fiberglass with a Gel Coat surface

COLUMN- 6.6" Diameter, Steel Column

ACCUMULATION- Allowed. Chute is self-starting once bottom is cleared out.

EXIT SWOOP- Standard exit to allow smooth discharge. *May not be applicable depending on design configuration.

BASE PLATE- 3' x 3' square base plate with leveling bolts and Anchor holes.

• OPTIONAL EQUIPMENT

EXTENSIONS–12ga. Galv. Infeed and Exit Extension's available upon need.

CUSTOM COLORS–Available (Contact factory), Paint chip may be required.

HYTROL